



READ INSTRUCTIONS THOROUGHLY BEFORE OPERATING



TIRE SERVICE INTERNATIONAL

800.223.4540

**3451 S 40th St
Phoenix, AZ 85040
602-437-5020**

**www.buytsi.com
sales@buytsi.com
Fax. 602-437-5025**

GENERAL INFORMATION




USE CAUTION: Wear Safety Glasses!

1. Remove tire valve cap.
2. **PRESS** the ON/OFF button to turn on the inflator. (If unused the inflator will turn off automatically 90 seconds later.)
3. With clip-on air chuck lever depressed, firmly press chuck onto tire valve stem and release lever, ensure that no air leaks.
4. **LIGHT:** In darkness, press the Light button to turn on the backlight, so to read the pressure easily, the backlight will extinguish automatically in 3-5 seconds. The backlight will not be activated by turning on the inflator, can only be activated by pressing the Light button.
5. **UNIT:** Press UNIT button above 3 seconds, enter unit change mode, then press UNIT button shortly to choose the desired unit. The unit chosen will be default unit for following usage.
6. The inflator can measure with 4 units: BAR-PSI-KPA-KGF. According to different market requirements, we will set the units before they ship.
7. The inflator's battery is AAA, if the voltage is below 2.4V, "LO" will be shown immediately after the inflator is turned on, furthermore, the low battery signal on the top left will be flashing continuously, to remind user to change the battery.
8. **MEASURING RANGE:** 0.5-12BAR (7-174PSI). Reading Accuracy is 0.01BAR (0.1PSI). When air pressure is above 17BAR (250PSI), LCD displays ----.



WARNING: To avoid the risk of personal injury to eyes, face or skin, DO NOT direct the stream at any person.

DG-20 Primary Features

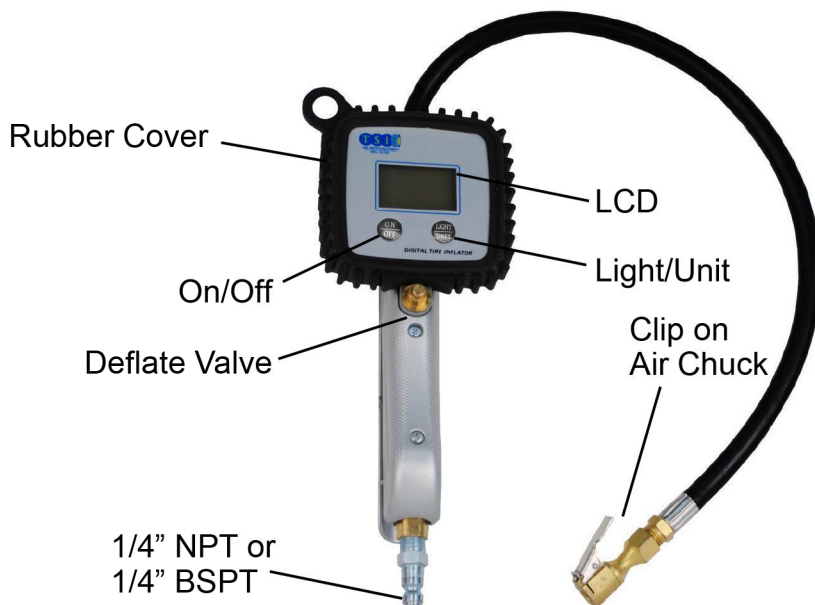

Accuracy reading (PSI/KPA/BAR)
0.1/1/0.01

Max inlet pressure(PSI/KPA/BAR)
250/1200/17


Inflation range (PSI/KPA/BAR)
0 to 175/1200/12

Actual Hose Length is 72"


GENERAL INFORMATION

HOW TO CHANGE THE BATTERY


The replacement battery is (2) AAA

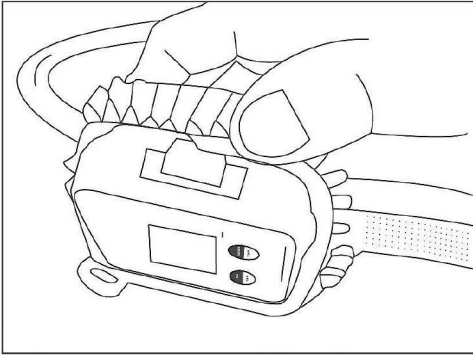


1. Open housing

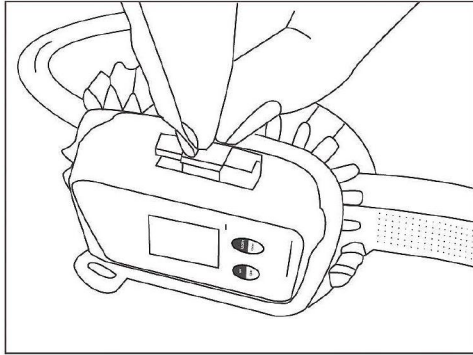


2. Open battery insert

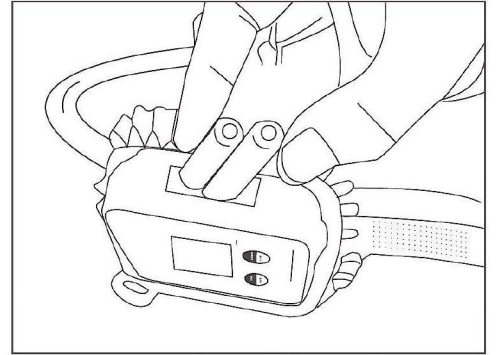

3. Put (2) AAA batteries in

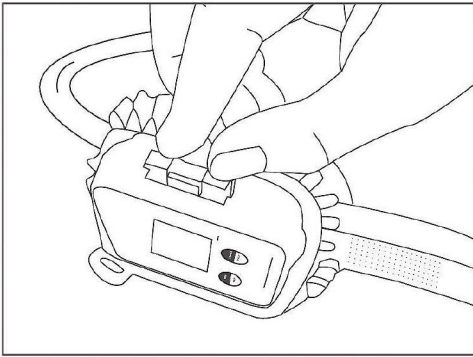

4. Close battery Insert

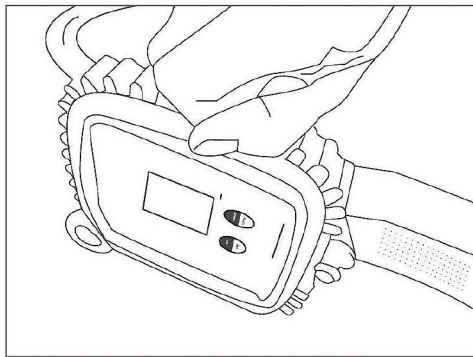

5. Finish

SPECIFICATIONS

Size:	12"L x 6" W x 5" H
Weight:	3 lbs

Warranty Statement & Return Policy

Warranty & Workmanship you can depend on.

With over 30 years of manufacturing experience we maintain the ability to provide competitive prices while employing and manufacturing the majority of our products in the USA. Pride in our workmanship and standing behind each and every product is not just our claim but our uncompromising responsibility.

TSI equipment is warranted to be free from defects in materials and workmanship for a period of one year from the date of original purchase to the original owner. Repair labor is warranted for 90 days from the date of original purchase. Bushings, blades, bearings and normal wear and tear are not covered under warranty. Careless handling, negligence, misuse, abuse, mutilation, improper operation, making unauthorized repairs, additions, and or alterations automatically cancel this warranty and relieves TSI of any obligation. Cheetah tanks claimed to be defective while under warranty will be evaluated at our manufacturing plant and either repaired if possible or exchanged and returned or credit issued to the customer account at our discretion. Damage resulting from dropping the tanks will not receive warranty consideration. Warranty parts need to be returned prepaid to the plant for credit. Any replacement parts shipped from the plant will be shipped at the customer's expense. Machines requiring warranty work must be brought to the manufacturing plant in 201 Chelsea Rd, Monticello, MN or to a repair facility authorized by TSI.

Return Policy:

!!WARNING!! Goods returned without an RGA will be refused. A Returned Goods Authorization form must be obtained before returning any material or goods. All non-warranty returns will be subject to a 15% restocking fee plus any additional charges for reconditioning/repacking.