


SU100A and SU200ASingle StepperDouble StepperbuyTSI.com-800.223.4540



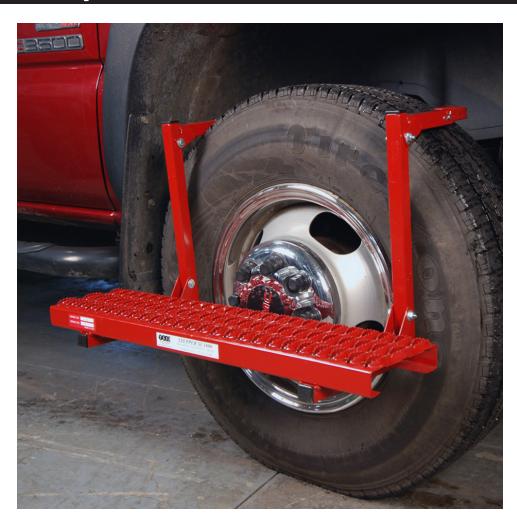

Read this manual before operating

Tire Service International, LLC 3451 S. 40TH ST. Phoenix, AZ 85040

Contact us for any assistance 800.223.4540

Office: 602.437.5020 Email: sales@buytsi.com Fax: 602.437.5025

Revised: March 2024

Safety Requirements

1. Be sure the tire is relatively clean and free of snow or mud to allow the stepper to be secure.


2. Make sure the step is centered and is touching the tire on both sides - not the hub.

3. Check stability before applying all weight on the step.

4. Be sure to have a hand-hold to help in stepping up and down.

5. The step is sharp. Use caution when folding for storing and opening.





Operation Notes

The SU100A Stepper[™] gives you safe and secure footing while you work on truck engines. This convenient tool goes over the front or rear tire of the vehicle to give you easier access to hardto-reach places. It's adjustable for most tire sizes and folds at for convenient transport and storage.



This double step version allows the user even more clearance while working on truck engines, while providing a safe and secure footing. It is adjustable for most tire sizes and both steps fold at for convenient transportation and storage.



Repair Parts List

SU100A Assembly		
Component	Description	Qty
11676	Frame Stepper	1
3085	HHCS 1/4-20 x 1-3/4 Grade 5	4
226-N	Nut 1/4-20 Nyloc	4
11716	Pin, Clevis 1/4 x 1-1/4	2
11727	Pin, Cotter Hairpin 1/4 to 3/8	2
11718	Plug, Plastic for Inside of Square Tube	6
6097	Step Support Weld	1
12235	Tape UHMN Polyethylene	1
6096	Tire Extension Weld	2
11744	Tube, Leg	2
445	Washer 1/4 Flat Wrought	8

SU200A Assembly		
Component	Description	
6481	Double Stepper Tire Extension	1
10084	HHCS 5/16-18 x 2 Grade 5	4
566	Nut 5/16-18 Nyloc	4
11714	Pin, Clevis 5/16 Dia x 1 1/4 Zinc Plated	2
	w/Hole	
12953	Pin, Cotter Hairpin 5/16 to 3/8	2
11718	Plug, Plastic for Inside of Square Tube	8
6480	Step Support Weld	1
6479	Step Support Weld	1
6478	Tire Extension Bracket Weldment	2
12832	Tube, Leg	2
445	Washer 1/4 Flat Wrought	12

California Proposition 65

California's Proposition 65 entitles California consumers to special warnings for products that contain chemicals known to the state of California to cause cancer and birth defects or other reproductive harm if those products expose consumers to such chemicals above certain threshold levels.

WARNING: Some of Tire Service International's products can expose you to chemicals including chromium compounds, which are known to the State of California to cause cancer, birth defects or other reproductive harm. For more information, go to **www.P65Warnings.ca.gov**.

Your risk from exposure to these chemicals varies, depending on exposure time. To reduce your exposure, work in a well-ventilated area and with approved safety equipment, such as dust masks that are specially designed to filter out microscopic particles. Wash your hands after touching TSI's products.

Warranty and Return Policy

Warranty & Workmanship you can depend on.

With over 30 years of manufacturing experience we maintain the ability to provide competitive prices while employing and manufacturing the majority of our products in the USA. Pride in our workmanship and standing behind each and every product is not just our claim but our uncompromising responsibility.

Tire Service International equipment is warranted to be free from defects in materials and workmanship for a period of one year from the date of original purchase to the original owner. Repair labor is warranted for 90 days from the date of original purchase. Bushings, blades, bearings and normal wear and tear are not covered under warranty. Careless handling, negligence, misuse, abuse, mutilation, improper operation, making unauthorized repairs, additions, and or alterations automatically cancel this warranty and relieves TSI of any obligation. Cheetah tanks claimed to be defective while under warranty will be evaluated at our manufacturing plant and either repaired if possible or exchanged and returned or credit issued to the customer account at our discretion. Damage resulting from dropping the tanks will not receive warranty consideration. Warranty parts need to be returned prepaid to the plant for credit. Any replacement parts shipped from the plant will be shipped at the customer's expense. Machines requiring warranty work must be brought to the manufacturing plant in 201 Chelsea Rd, Monticello, MN or to a repair facility authorized by TSI.



!!WARNING!! Goods returned without an RGA will be refused. A Returned Goods Authorization form must be obtained before returning any material or goods. All non-warranty returns will be subject to a 15% restocking fee plus any additional charges for reconditioning/repacking.

Visit www.buyTSI.com for any additional information. Also be sure to follow us on all the Socials, and subscribe to our YouTube channel for all our product videos.

No part of this manual may be reproduced without specific approval from Tire Service International, LLC.

Copyright © 2024 Tire Service International, LLC

